




Specifications:
 Current rating: 1 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -25°C ~ +105°C
 Contact resistance: 20mohm max.
 Insulation resistance: 5,000Mohm min.

Materials:
 Insulator: PBT (UL94V-0)
 Contact material: Phosphor Bronze
 Plating: Selective Gold Plated

HOW TO ORDER
 2200SA-39SG-E2X
 Empty Pin
 Selective Gold Plating 1u"
 No. Of Position
 Series Number

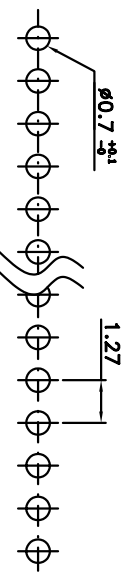

P.C.B LAYOUT

DRAWN: Jeremy Liu		GENERAL TOLERANCE: .X = ±0.2 .XX = ±0.15		 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 1.27MM CENTER SINGLE ROW PCB SOCKET	SIZE A4
CHECKED: Jerry Chen		UNIT: MM SCALE: 10:1 SHEET: 1 / 1 PROJECTION: 				
APPROVAL: Mike Wu		DRAWN: Jeremy Liu		PART NO: 2200SA-39SG-E2X		
REV	DATE	FILE	BY			
A	29-Jan-2004	New Mold	Jeremy Liu			