


MODEL:

# SREXTENDER

## Rack Enclosure Extension Frame

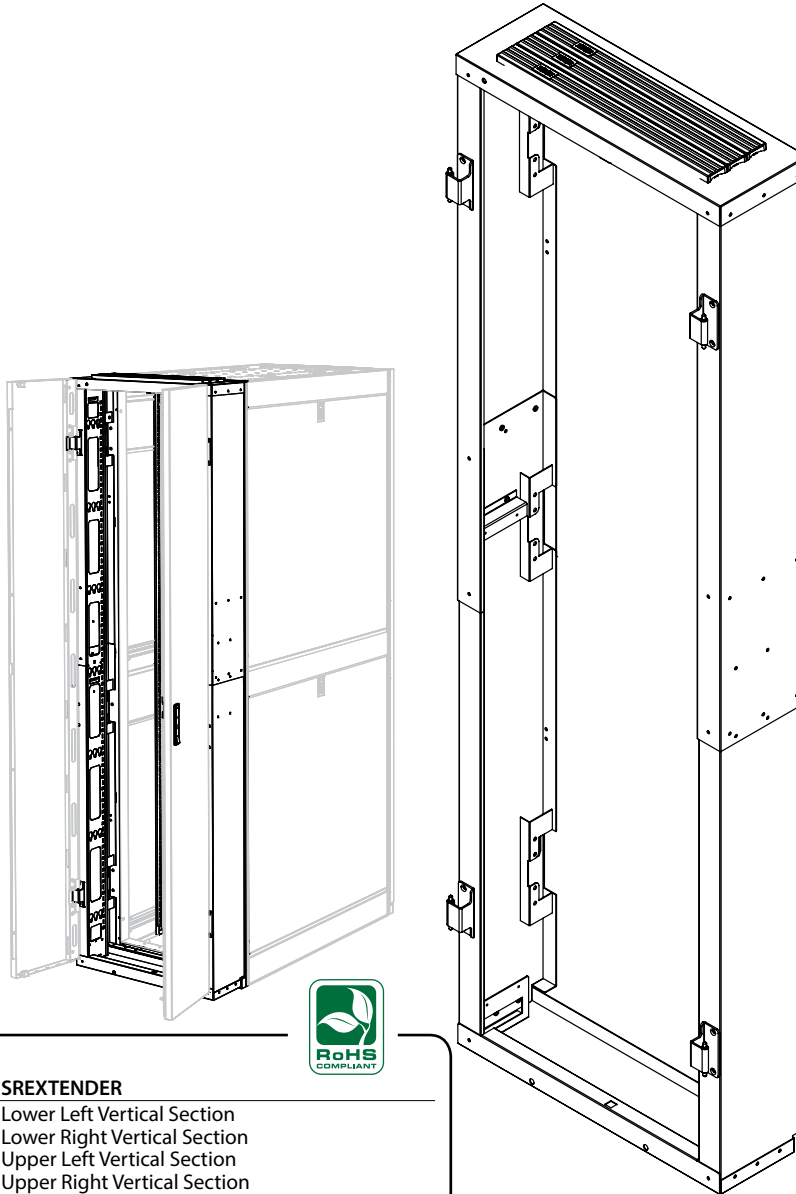

### Specifications

<b>Model</b>	<b>SREXTENDER</b>
<b>Contents</b>	Lower Left Vertical Section Lower Right Vertical Section Upper Left Vertical Section Upper Right Vertical Section Top Section Bottom Section (3) 1U Blanking Panels (6) Hinge Swivels (pre-installed) (4) Hinges (2) Cable Manager Brackets (8) M6 x 12 mm Flat-Head Screws (14) M6 x 12 mm Pan-Head Screws and Washers (12 pre-installed) (40) M5 x 10 mm Pan-Head Screws and Washers (4) M5 x 20 mm Pan-Head Screws and Washers (8) M4 x 8 mm Pan-Head Screws and Washers Grounding Cable
<b>Unit Dimensions (W x D)</b>	23.7 x 7.9 in. (60.2 x 20 cm) <i>Note: height is adjustable in 25U, 42U and 48U dimensions</i>
<b>Unit Weight</b>	55.1 lb. (25 kg)
<b>Shipping Dimensions (H x W x D)</b>	9.3 x 47.5 x 8 in. (23.6 x 120.7 x 20.3 cm)
<b>Shipping Weight</b>	60 lb. (27.2 kg)
<b>Regulatory Compliance</b>	Meets RoHS standards

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

The SREXTENDER attaches to the rear of a SmartRack® 25U, 42U or 48U rack enclosure to increase mounting depth by 8 inches without replacing the enclosure or reinstalling connected equipment. It installs by merely removing the enclosure's rear doors, attaching SREXTENDER to the existing hinges, and reattaching the doors to the extension frame.



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com