


# Specification Control Drawing


## Raychem


a) Part as supplied

210W3\*\*

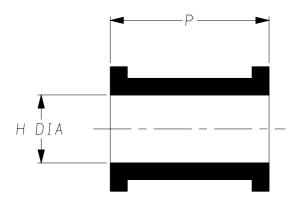

b) Part after unrestricted recovery

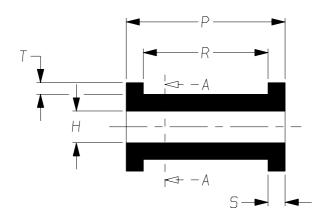



DIMENSIONS in millimetres (in inches, for reference)


	H	+		J	F		R	S	T	X
Part No.	Min	Max	Min	Max	±2	Max	±10%	±10%	±10%	±10%
	а	b	а	b	а	b	b	b	b	b
210W321	12 {0.47}	5.9 {0.23}	12 {0.47}	10.1 {0.40}	25 (0.98)	31 {1.22}	25 {0.98}	3.0 {0.12}	2.0 {0.08}	12 {0.47}
210W331	16 (0.63)	7.8 {0.31}	16 (0.63)	12.2 {0.48}	27 {1.06}	32 (1.26)	24 {0.94}	4.0 {0.16}	2.5 (0.10)	14 {0.55}

Copyright (!)

The copyright in this drawing is the property of Tyco Electronics UK Ltd. The drawing is issued on the condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Tyco Electronics UK Ltd.

Raychem	Specificati Control Dr	210W3** Issue 3
Iss. Date	E.C.R. No.	Details of Change
3 January 2007	CR0101 CR06-HM-012 CR06-DM-104	210W321 - R dim was 22 Imperial dimensions added -12 Material description name changed

### (Ordering Information)

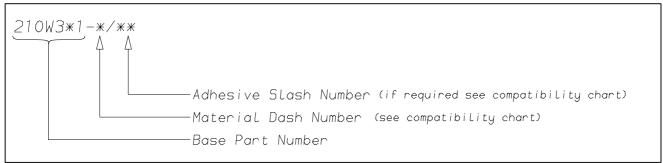

#### COMPATIBILITY CHART

Material Dash Number Material Description		SPEC Number	Coating Slash Number	
-3	POLYOLEFIN, SEMI-RIGID	RT-301, RK-6703	/42 ,/86, /180	
-4	POLYOLEFIN, FLEXIBLE	RT-1304 RT-1050	/42 ,/86, /180	
-12	FLUOROELASTOMER, FLEXIBLE	RT-1312, RW-2071	/225	
-25	ELASTOMER, FLUID RESISTANT	RT-1325, RK-6713	/42, /86, /225	
-100	ZERO HALOGEN	RT-1323, RK-6717	/86 <b>,</b> /180	
-130	POLYOLEFIN, COMMERCIAL FLEXIBLE	RW-2008	/42	

#### NOTES

1) As supplied dimensions are for uncoated parts, when coating is added entry diameters will reduce by 1.5mm Max.

	Faraday Road, Swindon, Wiltshire, SN3 5HH	Tyco Electronics Corporation 300, Constitution Drive, Menlo Park, CA 94025
	England Telephone: (01793) 528171 Fax: 572516	USA Telephone (650) 361–3860 Fax: (650) 361–5579
Ī	Cage Code K1010	Cage Code 06090